


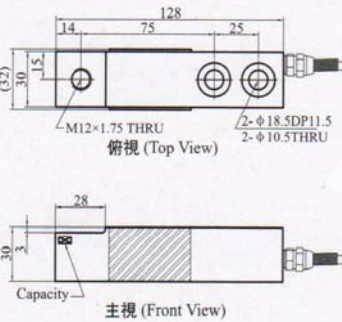
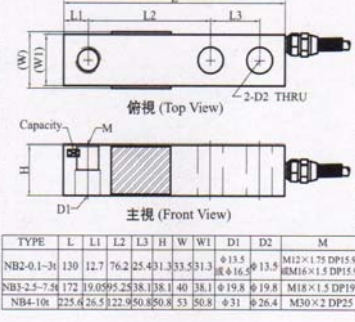
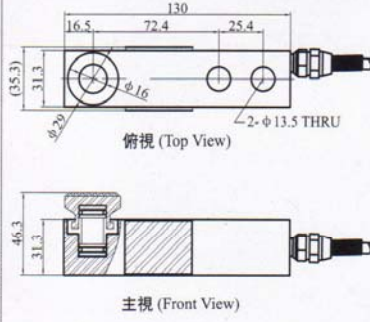


型號 (Model)	NB1	NB2~4	NB5																																												
Outside view 外形																																															
Drawing 尺寸	 <p>俯視 (Top View)</p> <p>主視 (Front View)</p>	 <p>俯視 (Top View)</p> <p>主視 (Front View)</p> <table border="1"> <thead> <tr> <th>TYPE</th> <th>L</th> <th>L1</th> <th>L2</th> <th>L3</th> <th>H</th> <th>W</th> <th>WT</th> <th>D1</th> <th>D2</th> <th>M</th> </tr> </thead> <tbody> <tr> <td>NB2-0.1-30</td> <td>130</td> <td>12.7</td> <td>76.2</td> <td>25.4</td> <td>31.3</td> <td>53.1</td> <td>3.2</td> <td>φ13.5</td> <td>φ13.5</td> <td>M12×1.75 DP15.9</td> </tr> <tr> <td>NB3-2.5-7.5</td> <td>172</td> <td>19.0</td> <td>95.2</td> <td>25.38</td> <td>38.1</td> <td>40</td> <td>38.1</td> <td>φ19.8</td> <td>φ19.8</td> <td>M18×1.5 DP19</td> </tr> <tr> <td>NB4-10</td> <td>225</td> <td>26.5</td> <td>122.9</td> <td>30.8</td> <td>50.8</td> <td>53</td> <td>50.8</td> <td>φ31</td> <td>φ26.4</td> <td>M30×2 DP25</td> </tr> </tbody> </table>	TYPE	L	L1	L2	L3	H	W	WT	D1	D2	M	NB2-0.1-30	130	12.7	76.2	25.4	31.3	53.1	3.2	φ13.5	φ13.5	M12×1.75 DP15.9	NB3-2.5-7.5	172	19.0	95.2	25.38	38.1	40	38.1	φ19.8	φ19.8	M18×1.5 DP19	NB4-10	225	26.5	122.9	30.8	50.8	53	50.8	φ31	φ26.4	M30×2 DP25	 <p>俯視 (Top View)</p> <p>主視 (Front View)</p>
TYPE	L	L1	L2	L3	H	W	WT	D1	D2	M																																					
NB2-0.1-30	130	12.7	76.2	25.4	31.3	53.1	3.2	φ13.5	φ13.5	M12×1.75 DP15.9																																					
NB3-2.5-7.5	172	19.0	95.2	25.38	38.1	40	38.1	φ19.8	φ19.8	M18×1.5 DP19																																					
NB4-10	225	26.5	122.9	30.8	50.8	53	50.8	φ31	φ26.4	M30×2 DP25																																					
Rated Capacities 額定負荷:	100, 150, 200, 300, 500, 750, 1000 (kg)	0.1, 0.2, 0.3, 0.5, 1, 1.5, 2, 2.5, 3, 5, 7.5, 10 (t)	0.5, 1, 2, 2.5, 3 (t)																																												
Rated Output 額定輸出:	2.0 mV/V±0.15%	2.0 mV/V±0.15%; 3.0 mV/V±0.15%	2.0 mV/V±0.15%; 3.0 mV/V±0.15%																																												
Zero Balance 零點平衡:	±0.0200 mV/V	±0.0200 mV/V	±0.0200 mV/V																																												
Non-linearity 非線性:	0.03% R.O.	0.03% R.O.	0.03% R.O.																																												
Hysteresis 滯后:	0.03% R.O.	0.03% R.O.	0.03% R.O.																																												
Repeatability 重複性:	0.03% R.O.	0.03% R.O.	0.03% R.O.																																												
30mins Creep 蠕變 (30分鐘):	0.03% R.O.	0.03% R.O.	0.03% R.O.																																												
30mins Return 回零 (30分鐘):	0.03% R.O.	0.03% R.O.	0.03% R.O.																																												
Safe Overload 安全過載率:	150% R.O.	150% R.O.	150% R.O.																																												
Ultimate Overload 極限過載率:	200% R.O.	200% R.O.	200% R.O.																																												
Temperature Effect On Output 輸出溫度影響:	0.002% R.O./°C	0.002% R.O./°C	0.002% R.O./°C																																												
Temperature Effect On Zero 零點溫度影響:	0.003% R.O./°C	0.003% R.O./°C	0.003% R.O./°C																																												
Input Impedance 輸入阻抗:	410±15 Ω	390±15 Ω	390±15 Ω																																												
Output Impedance 輸出阻抗:	350±5 Ω	350±5 Ω	350±5 Ω																																												
Insulation Impedance 絕緣阻抗:	≥5000 MΩ/(50VDC)	≥5000 MΩ/(50VDC)	≥5000 MΩ/(50VDC)																																												
Recommended Excitation 推薦工作電壓:	5~12 VDC	5~12 VDC	5~12 VDC																																												
Maximum Excitation 最大工作電壓:	15 VDC	15 VDC	15 VDC																																												
Operating Temperature Range 工作溫度範圍:	-20~60 °C	-20~60 °C	-20~60 °C																																												
Construction 材質:	Aluminum Alloy 鋁合金	Steel Alloy 合金鋼	Steel Alloy 合金鋼																																												
Protection Class 防護等級:	IP67 / IP68	IP67 / IP68	IP67 / IP68																																												
Cable 電纜:	φ6×2 m	φ6×3 m ; φ6×6 m	φ6×3 m																																												
Recommended Platform Size 推薦臺面尺寸:																																															
Usage & Features 用途特點:	Hopper Scale 料門秤 Platform Scale 臺秤	Hopper Scale 料門秤 Floor Scale 磅秤 Industrial Weighing System 工業稱重系統	Hopper Scale 料門秤 Floor Scale 磅秤 Industrial Weighing System 工業稱重系統																																												