

**JADEVER<sup>®</sup>**

# Bench Scale Series

Weighing / Checking / Counting

Fast and Accurate

**S**imple operation makes Jadever bench scale, JS/JPS/JC/JPC, very easy to use. With 1/12,000 display resolution, JS/JPS/JC/JPC bench scale series offer an accurate measurement. Even more, with IP 66 load cell in side, JS/JPS/JC/JPC bench scale series provides maximum durability and complete protection against water damage.




## Features

- Moisture protected load cell
- Stainless steel weighing pan with aluminum alloy construction for heavy load use
- Large easy-to-read LCD with backlight
- Auto Calibration / Software calibration
- Weight checking function (HI、LO、OK)
- 4 selectable Capacity-Resolutions
- Beep for check function
- Built-in battery charger
- Rechargeable battery last for 100 Hours per charge
- Selectable multiple weigh units
- Total weight and accumulated times can be summed and recalled later. Up to 99 items can be added in one accumulation
- LCD Display shows Weight, Unit weight and Total count. Two levels of digital filter are software-selectable for avoiding unstable results when weighing vibrating objects or in environments with wind or vibration
- Auto shut off function (5,10,30,60, minutes or none after there is no load on the pan)
- Backlight On / OFF/ Auto


## Specifications

Model	Weighing JS/JPS									Counting JC/JPC					
	JS-15	JS-30	JS-60	JS-100	JPS-6000	JPS-1050	JPS-2030			JC-30	JC-60	JPC-3015	JPC-1560		
Capacity(kg)	15	30	60	100	60	100	150	200	300	30	60	300	150	60	120
Resolution(g)	5	10	15	10	5	10	20	20	50	2	5	20	10	5	20
Counting resolution (g)										0.4	1	4	2	1	4
Pan size (mm)	332 x 442				430 x 530					332 x 442		430 x 530			
Net weight	13kg				17kg					13kg		17kg			
Battery life	100hrs				100 hrs					100hrs		100hrs			
Display	LCD with backlight, 25mm(H), 6 digits									LCD with backlight, 14mm(H) x 7mm(W), weight: 5 1/2 digits, unit weight: 5 digits, total count: 5 digits					
Operating temp.	-5°C ~ 35°C / 23°F ~ 95°F														
Power	110,120,220,240 VAC ± 10%, 50/60 Hz, operated by AC power / Rechargeable battery of 100 hours battery life.														
Optional accessories	RS-232 interface														

## Dimension

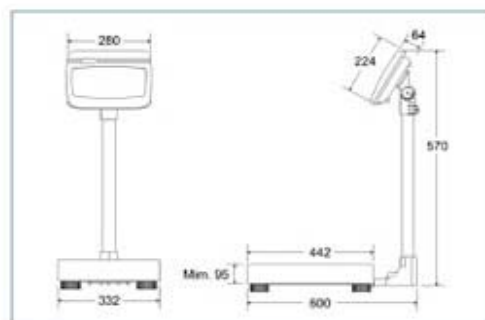

JS / JC

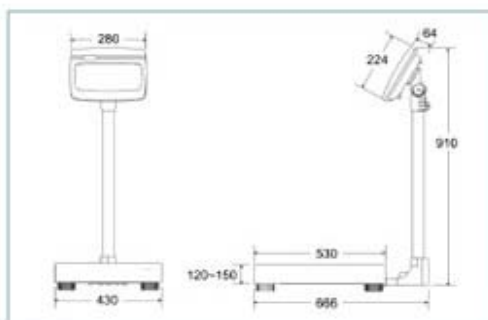

JPS / JPC

# JADEVER®

Jadever Scale Co., Ltd.

No. 5, Wu-Chuan 2Rd., Wu-Ku Hsiang, Taipei Hsien, Taiwan

Tel: 886-2-2299-0203 Fax: 886-2-2299-0204

http://www.jadever.com.tw E-mail: jadever@jadever.com.tw

Jadever Weightech, Inc.

275 Calvert Road, Markham, Ontario, Canada L6C 1V1

Tel: 1-905-887-4888 Fax: 1-905-887-4066

http://www.jadeverscale.com E-mail: info@jadeverscale.com

Distributed by