

Network Phone Camera





IR CUT



WIFI Connection



Max 64 G









P2P Cloud






กล้อง IP CAMERA สามารถดูภาพย้อนหลังได้





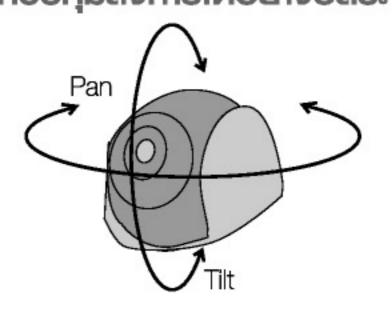

กล้อง IP CAMERA ภาพ Real Time คมชัดระดับ HD



กล้อง IP CAMERA เมนูไทย ใช้งานง่าย





- ช่วยให้คุณดูแลคนพู้สูงอายุหรือเด็กที่บ้าน
- ช่วยให้คุณมองเห็นคนที่คุณห่วงได้ตลอดเวลา
- ไม่ต้องเตินสาย และตั้งค่าตัวเครื่องได้ง่าย ๆ











Management















CNS2

SMART FAMILY CARE SYSTEM

Network Phone Camera

Feature

Housing: Snowman design, rotation support. Len: High definition Lens, with vivid image.

LED: Build in light compensation IR LED, Night vision are supported

Support WIFI connection

Adopted with H.264 video compression

Support Remote access (iPhone:Android etc.)

64G TF Card

720P Real time video are available

Motion detection, Intelligent Alarm



Specification

| Model | CMS2 |
|-------------------|--|
| Sensor | 1/4" CMOS |
| Low Illumination | Color: 0.5Lux @(F1.2,AGC ON),0 LUX with IR |
| | Black/White:0.05 Lux@(F1.2,AGC ON),0 LUX with IR |
| Shutter | 1/50(1/60) Second to 1/100,000 Second |
| Len | 3.6mm |
| Video compression | H.264 High Profile, MJPEG snapshot |
| Output bit rate | 30Kbps~2Mbps |
| Resolution | 1280*720 |
| Storage | SD card memory, Internet storage |
| Intelligent alarm | Motion detection |
| Protocol | TCP/IP,HTTP,DDNS,NTP(HTTPS,SIP,802.1X) |
| General function | Flicker filter, Three streams, password protection, Heart beat |
| Audio in | Build in 1pc MIC |
| Audio out | Build in 1pc HD speaker |
| Internet Port | 1pc network port |
| TF card port | 1pc TF card port,MAX 64G |
| Reset button | Restore to factory default |
| PTZ | Pan:355°, Tilt:120° |
| Led | 11pcs IR LED |
| Power | DC5V/2.0A |
| Power dissipation | <4W |
| IR Distance | 3-15M |
| Temperature | -10°C ~ +55°C |
| Humidity | 10 ~ 90% |
| Size | 117mmx117mmx130mm |
| Weight | 510g |







■ HIP Shop

■ HIP Service Center

HIP Training Center



















