


# 4PSS14

# Panel Connection

ISO 9001  

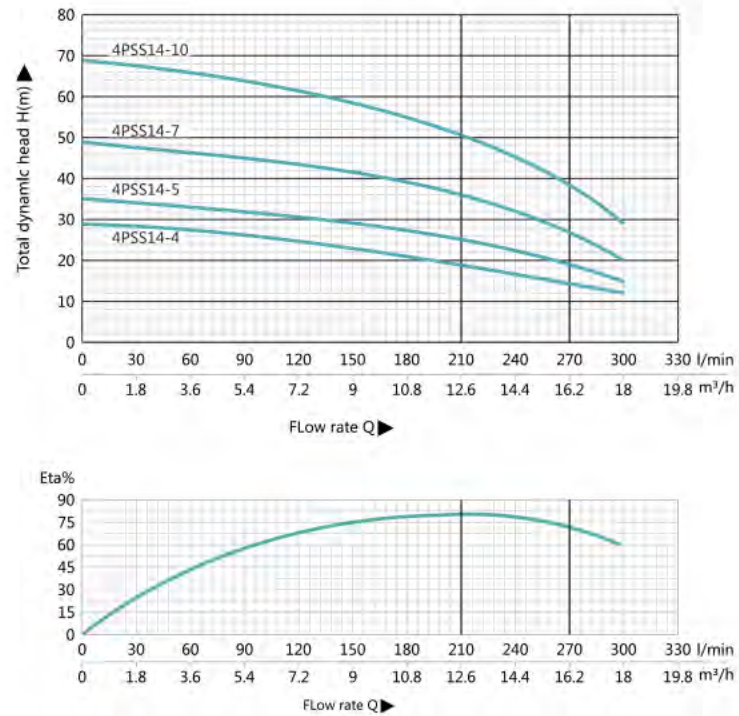

## 4PSS14


Model	Voltage DC(V)	Power		Delivery n≈3450 l/min												
		KW	HP	Q	m³/h	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2	18
4PSS14-4	96	1.5	2	Q	l/min	29	28	27	26	25	23	21	19	17	15	12
4PSS14-5	156	2.2	3	H(m)												
4PSS14-7	216	3	4	35 34 33 32 31 29 27 25 22 19 15												
4PSS14-10	276	4	5.5	49 48 46 45 43 41 39 36 32 27 20												
				69 68 66 64 62 58 55 51 45 38 29												

Model	Power KW	Dimensions(mm)					Weights(kg)					DN
		M	M1	P	T	T1	M	M1	P	T	T1	
4PSS14-4	1.5	225	330	371	596	701	8.5	8.5	3.3	11.8	11.8	2"
4PSS14-5	2.2	255	350	414	669	764	10	10.5	3.8	13.8	14.3	2"
4PSS14-7	3	285	430	500	785	930	11.9	12.5	4.6	16.5	17.1	2"
4PSS14-10	4	305	460	630	935	1090	13.9	14.5	5.8	19.7	20.7	2"

## 4PSS14-4:

280W Panel, 8pcs in 2 line


Panel power: 2000W-2500W  
Panel voltage: 115V-150V

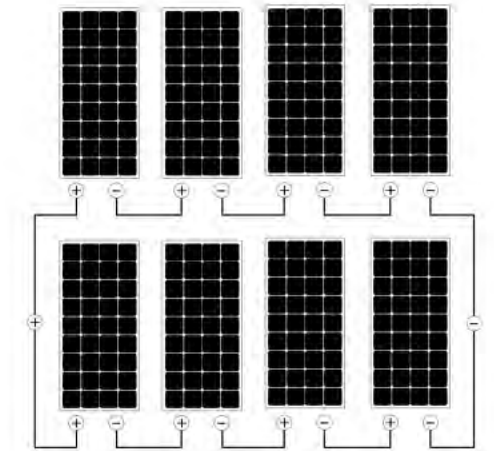

## 4PSS14-5:

280W Panel, 12pcs in 2 line

Panel power: 2800W-3500W  
Panel voltage: 175V-230V

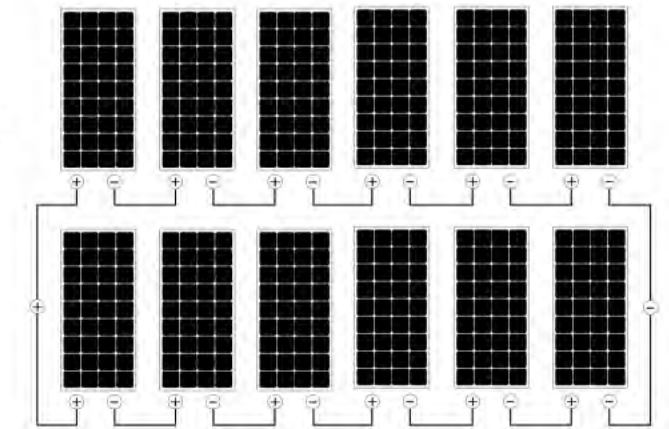

## 4PSS14-7:

280W Panel, 18pcs in 2 line

Panel power: 4000W-4500W  
Panel voltage: 235V-290V

