



4PSS14-H

Panel Connection

ISO 9001  

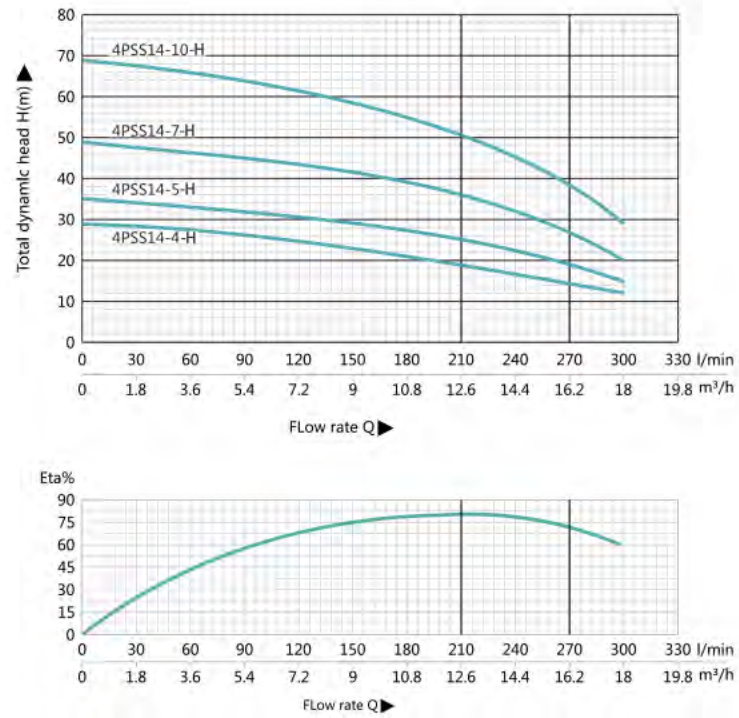

4PSS14-4-H: 260W Panel, 10pcs in 1 line

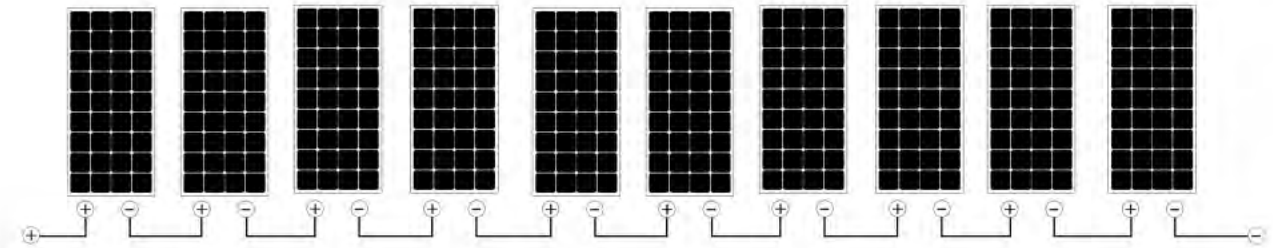


Panel power: 2000W-2500W Panel voltage: 300V-350V

4PSS14-H

Model	Voltage DC(V)	Power		Delivery n≈3450 l/min													
		KW	HP	Q	m³/h	0	1.8	3.6	5.4	7.2	9	10.8	12.6	14.4	16.2	18	
4PSS14-4-H	96	1.5	2	Q	l/min	0	30	60	90	120	150	180	210	240	270	300	
4PSS14-5-H	156	2.2	3	H(m)													
4PSS14-7-H	216	3	4	29 28 27 26 25 23 21 19 17 15 12													
4PSS14-10-H	276	4	5.5	35 34 33 32 31 29 27 25 22 19 15													
				49 48 46 45 43 41 39 36 32 27 20													
				69 68 66 64 62 58 55 51 45 38 29													

4PSS14-5-H: 280W Panel, 10pcs in 1 line

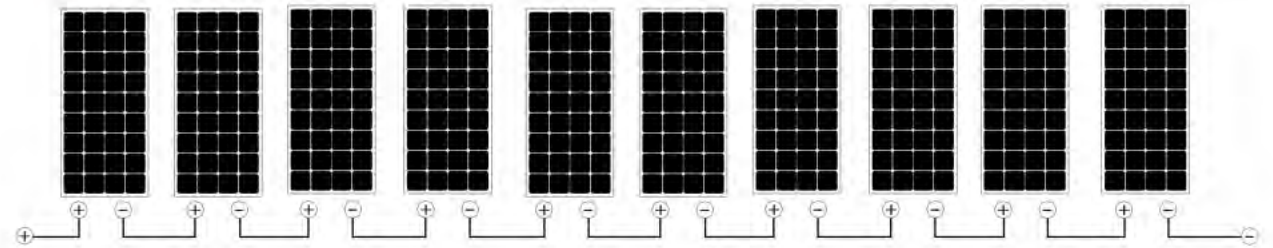

Panel power: 2800W-3500W Panel voltage: 300V-350V

Model	Power KW	Dimensions(mm)					Weights(kg)					DN
		M	M1	P	T	T1	M	M1	P	T	T1	
4PSS14-4-H	1.5	225	330	371	596	701	8.5	8.5	3.3	11.8	11.8	2"
4PSS14-5-H	2.2	255	350	414	669	764	10	10.5	3.8	13.8	14.3	2"
4PSS14-7-H	3	285	430	500	785	930	11.9	12.5	4.6	16.5	17.1	2"
4PSS14-10-H	4	305	460	630	935	1090	13.9	14.5	5.8	19.7	20.7	2"