








Maximum Working Pressure : 27.5MPa / 4,000PSI

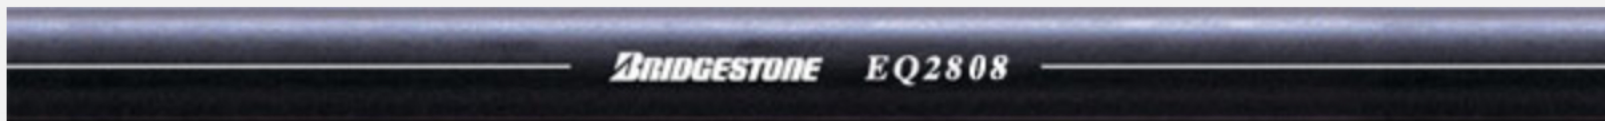

BRIDGESTONE EQ2808

Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
EQ2808-77	1/2	12.7	0.90	22.8	4,000	27.5	20,000	137.5	3.94	100	0.52	780	4S	UB
EQ2810-77	5/8	15.9	1.06	26.8	4,000	27.5	20,000	137.5	5.12	130	0.67	1,000		
EQ2812-77	3/4	19.0	1.17	29.6	4,000	27.5	20,000	137.5	6.30	160	0.75	1,130		
EQ2816-77	1	25.4	1.44	36.7	4,000	27.5	20,000	137.5	7.87	200	1.17	1,750		
EQ2820	1-1/4	31.8	1.79	45.5	4,000	27.5	20,000	137.5	11.81	300	2.43	3,640	6S	UZ
EQ2824	1-1/2	38.1	2.19	55.5	4,000	27.5	20,000	137.5	14.17	360	2.89	4,340		KN

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +120°C (-40°F to +248°F)
Temperature Range : ambient	-40°C to + 70°C (-40°F to +158°F)
Inner Tube	Oil Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

Reinforcement

