









Maximum Working Pressure : 24.5MPa / 3,500PSI

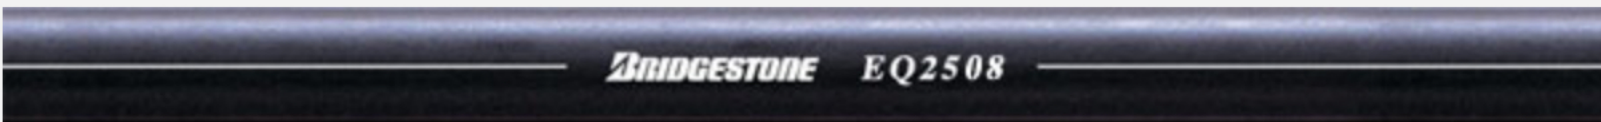

BRIDGESTONE EQ2508

Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
EQ2508-77	1/2	12.7	0.90	22.8	3,500	24.5	17,500	122.5	3.94	100	0.52	780	4S	UB
EQ2510-77	5/8	15.9	1.06	26.8	3,500	24.5	17,500	122.5	5.12	130	0.67	1,000		
EQ2512-77	3/4	19.0	1.17	29.6	3,500	24.5	17,500	122.5	6.30	160	0.75	1,130		
EQ2516-77	1	25.4	1.44	36.7	3,500	24.5	17,500	122.5	7.09	180	1.17	1,750		
EQ2520	1-1/4	31.8	1.79	45.5	3,500	24.5	17,500	122.5	10.24	260	1.71	2,560	6S	UZ
EQ2524	1-1/2	38.1	2.19	55.5	3,500	24.5	17,500	122.5	12.60	320	2.89	4,340		KN

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +120°C (-40°F to +248°F)
Temperature Range : ambient	-40°C to + 70°C (-40°F to +158°F)
Inner Tube	Oil Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

Reinforcement

