


Maximum Working Pressure : 20.5MPa / 3,000PSI

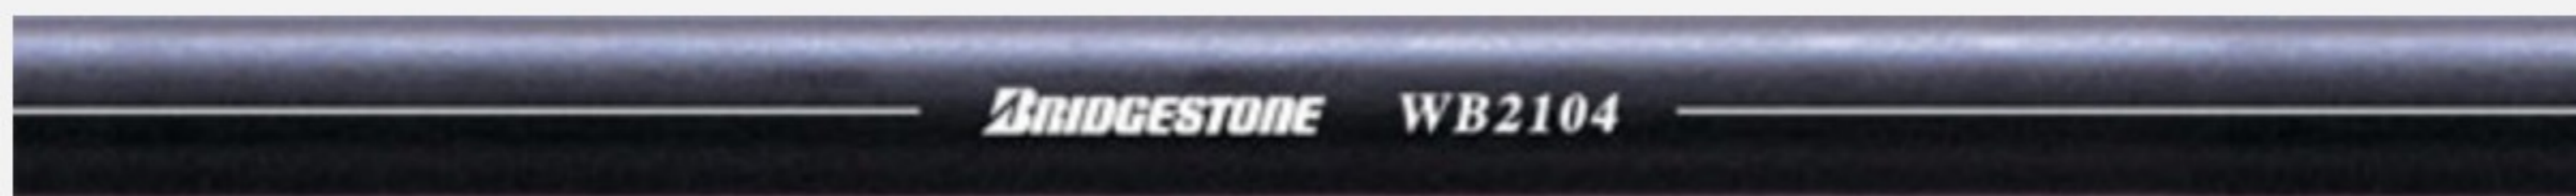


Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
WB2104	1/4	6.3	0.55	14.0	3,000	20.5	9,000	61.5	2.56	65	0.15	230	1W	UZ
WB2106	3/8	9.5	0.68	17.2	3,000	20.5	9,000	61.5	3.35	85	0.23	340		UB
WB2108	1/2	12.7	0.80	20.2	3,000	20.5	9,000	61.5	3.54	90	0.26	390		UZ
WB2112	3/4	19.0	1.18	30.0	3,000	20.5	9,000	61.5	5.51	140	0.63	940	2W	UB
WB2114	7/8	22.2	1.31	33.3	3,000	20.5	9,000	61.5	6.30	160	0.67	1,000		KH
WB2116	1	25.4	1.41	35.8	3,000	20.5	9,000	61.5	7.48	190	0.82	1,230		UB

Compatible Fluid	Water, Cement
Temperature Range : fluid	0°C to 80°C (32°F to 176°F)
Temperature Range : ambient	0°C to 70°C (32°F to 158°F)
Inner Tube	Water Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

Reinforcement

1W

1 wire braid



2W

2 wire braids

