








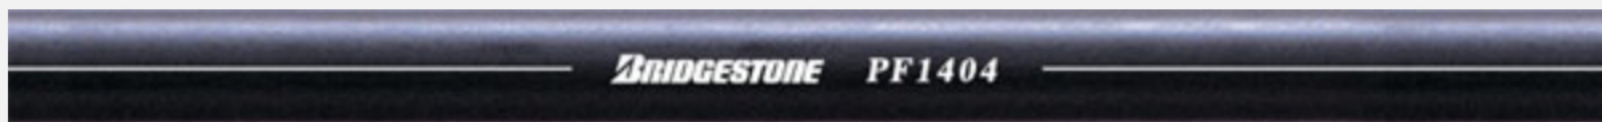


Maximum Working Pressure : 14.0MPa / 2,000PSI



Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
PF1404	1/4	6.3	0.46	11.7	2,000	14.0	8,000	56.0	1.57	40	0.10	150	1W	UZ
PA1406	3/8	9.5	0.60	15.2	2,000	14.0	8,000	56.0	1.97	50	0.15	230		UB
PA1408	1/2	12.7	0.74	18.7	2,000	14.0	8,000	56.0	2.36	60	0.23	350		UZ

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +100°C (-40°F to+212°F)
Temperature Range : ambient	-40°C to +70°C (-40°F to+158°F)
Inner Tube	Oil Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

Reinforcement



1 wire braid

