








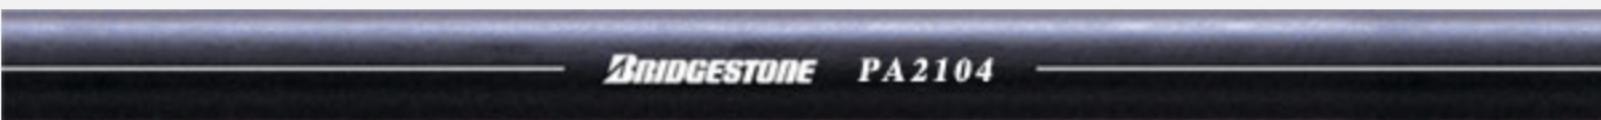

Maximum Working Pressure : 20.5MPa / 3,000PSI




Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
PA2104	1/4	6.3	0.54	13.8	3,000	20.5	12,000	82.0	2.76	70	0.17	250	1W	UZ
PA2106	3/8	9.5	0.71	18.0	3,000	20.5	12,000	82.0	3.54	90	0.31	470	2W	UB
PA2108	1/2	12.7	0.87	22.2	3,000	20.5	12,000	82.0	4.33	110	0.43	650		
PA2110	5/8	15.9	1.01	25.6	3,000	20.5	12,000	82.0	5.51	140	0.51	770		
PA2112	3/4	19.0	1.17	29.7	3,000	20.5	12,000	82.0	6.69	170	0.64	960		
PA2116	1	25.4	1.43	36.4	3,000	20.5	12,000	82.0	8.27	210	0.87	1,300		
PA2120	1-1/4	31.8	1.78	45.2	3,000	20.5	12,000	82.0	10.24	260	1.57	2,360	4S	UZ
PA2124	1-1/2	38.1	2.07	52.7	3,000	20.5	12,000	82.0	12.20	310	2.04	3,060		HW
PA2132	2	50.8	2.60	66.0	3,000	20.5	12,000	82.0	16.93	430	2.77	4,150		

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +100°C (-40°F to +212°F)
Temperature Range : ambient	-40°C to +70°C (-40°F to +158°F)
Inner Tube	Oil Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

Reinforcement


1W

1 wire braid



2W

2 wire braids



4S

4 spiral wires

