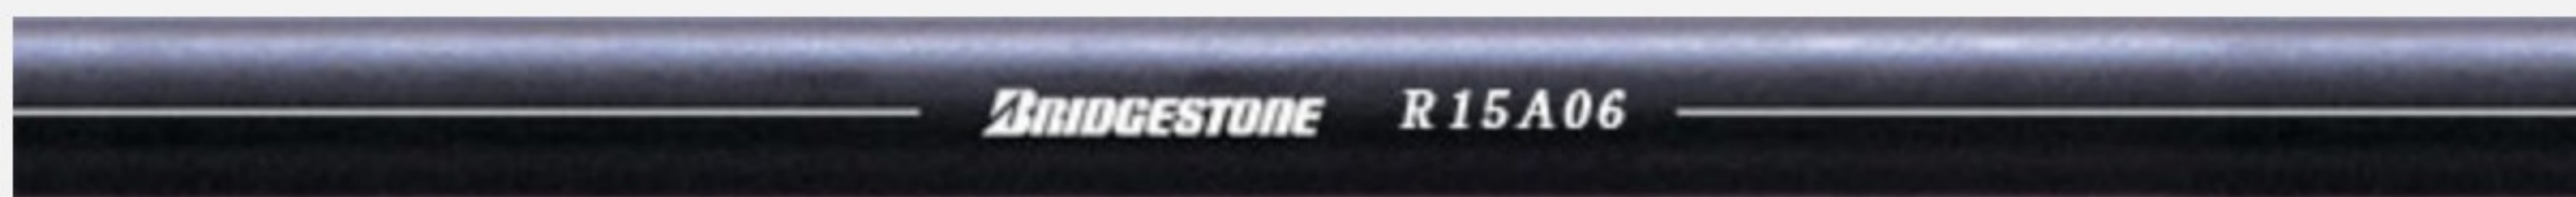


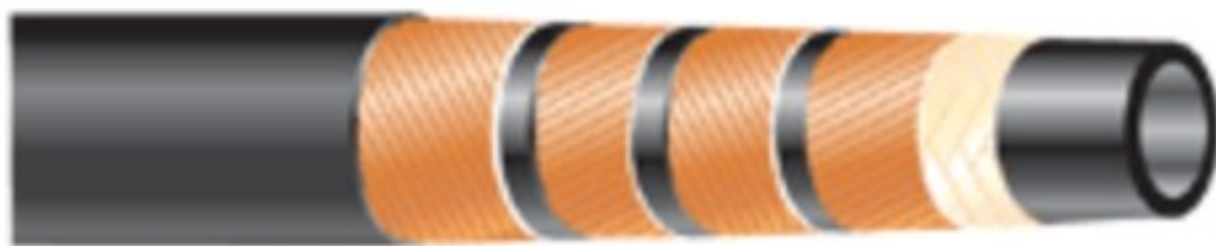

# R15A

## SAE 100R15



Catalog Number														PAEQ Series	
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight				Reinforcement
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m			
R15A06	3/8	9.5	0.92	20.3	6,000	42.0	24,000	168.0	5.91	150	0.48	720	4S		
R15A08	1/2	12.7	1.06	23.8	6,000	42.0	24,000	168.0	7.87	200	0.61	920			
R15A12	3/4	19.0	1.42	30.7	6,000	42.0	24,000	168.0	10.43	265	0.98	1,470			
R15A16	1	25.4	1.69	38.7	6,000	42.0	24,000	168.0	12.99	330	1.45	2,180			
R15A20	1-1/4	31.8	2.03	49.8	6,000	42.0	24,000	168.0	17.52	445	2.59	3,890	6S		
R15A24	1-1/2	38.1	2.35	57.3	6,000	42.0	24,000	168.0	20.87	530	3.17	4,760			

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +121°C (-40°F to +250°F)
Temperature Range : ambient	-40°C to +70°C (-40°F to +158°F)
Inner Tube	Synthetic Rubber
Outer Cover	Synthetic Rubber

Reinforcement	
<p><b>4S</b> 4 spiral wires</p>  <p>(R13A12/R13A16)</p>	
<p><b>6S</b> 6 spiral wires</p>  <p>(R13A20/R13A24/R13A32)</p>	