



**DIN 4SH**

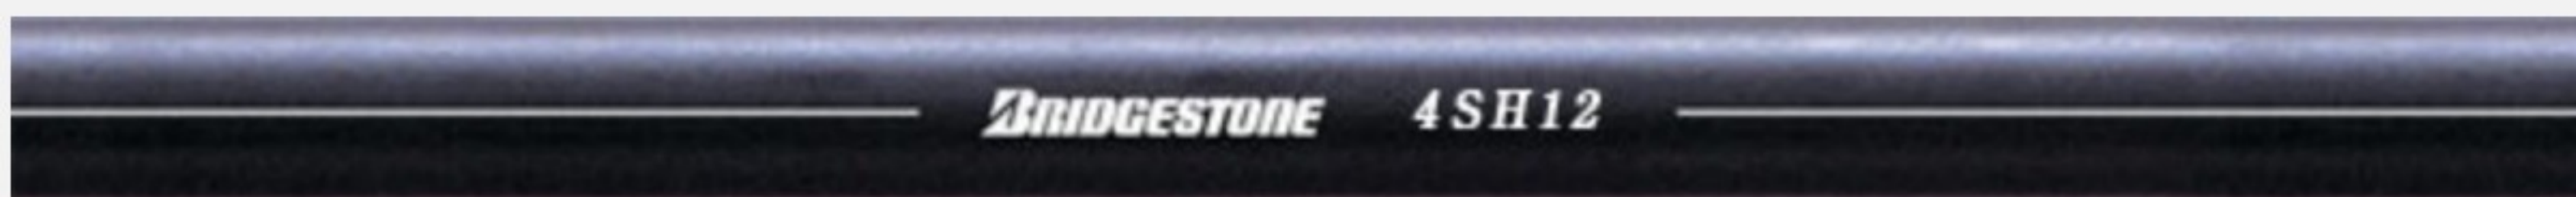

Catalog Number														PA/EQ Series	
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight				Reinforcement
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m			
4SH12	3/4	19.0	1.27	32.2	6,100	42.0	24,400	168.0	11.02	280	1.07	1,600	4S	HQ3512-77	
4SH16	1	25.4	1.52	38.7	5,500	38.0	22,000	152.0	13.39	340	1.50	2,250		HQ3516-77	
4SH20	1-1/4	31.8	1.79	45.5	4,700	32.5	18,800	130.0	18.11	460	1.73	2,600		PA2120	
4SH24	1-1/4	38.1	2.11	53.5	4,200	29.0	17,200	116.0	22.05	560	2.13	3,200		PA2124	
4SH32	2	50.8	2.68	68.1	3,600	25.0	14,400	100.0	27.56	700	3.20	4,800		PA2132	

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +100°C (-40°F to +250°F)
Temperature Range : ambient	-40°C to +70°C (-40°F to +158°F)
Inner Tube	Synthetic Rubber
Outer Cover	Synthetic Rubber

**Reinforcement**



**4S**  
4 spiral wires

