

DS-D4248FO-CLFS P4.8 Outdoor Fixel LED Display Unit



- Support front and rear maintenance
- Using aluminum chassis with good heat dissipation, workable under 60 °C
- All series aluminum profile cabinets support IP67(F)/IP66(R)
- Apply unique technology, maximally saving 30% energy
- Various cabinet sizes, applying to diverse scenes
- The cabinets support customized 45° corner cut to realize 90° right-angle splicing


▪ Specification

	Model	DS-D4248FO-CLFS
Cabinet	Pixel Configuration	1R1G1B
	Pixel Pitch Category	P3.91
	Pixel Pitch	3.91 mm
	Modules Component	Aluminum Shell
	Dimensions (W × H × D)	500 mm × 500 mm × 97 mm (19.7" × 19.7" × 3.82")
	Resolution	104 × 104
	Area	0.25
	Weight	9.12 KG/PCS
	Pixel Density	43264 dots/m ²
	Lamp Board Housing	Yes
	Cabinet Material	Aluminum Profile
	Maintenance Method	Front/Back Maintenance
	Cabinet Flatness	0.8 mm
Protection Level	IP67(F)/IP66(R)	
Key Material	Lamp Encapsulation	Nationstar Copper
	Control System	Novastar A5S+
Display	White Balance Brightness	4500
	Color Temperature	3000 K to 10000 K
	Viewing Angle	160° (H)/80° (V)
	Contrast Ratio	5000:1
	Color Uniformity	≥ 95%
	Brightness Uniformity	≥ 95%
Processing Performance	Driving Method	Constant Current
	Frame Frequency	50/60 HZ
	Refresh Rate	3840
	Grey Level	14 bit
	Display Color	DCI-P3 > 85%
Power	Power Supply	110 to 220
	Max. Consumption	650
	Average Consumption	210
Working Environment	Working Temperature	-40 to 60 °C
	Working Humidity	10% to 95% RH (non-condensing)
	Storage Humidity	10% to 95% RH (non-condensing)
	Storage Temperature	-40 to 80 °C
General	Gross Weight	75
	Package Dimension (W × H × D)	730 × 580 × 680
	Lifespan	100000 Hours

▪ Available Model

DS-D4248FO-CLFS


▪ Dimension

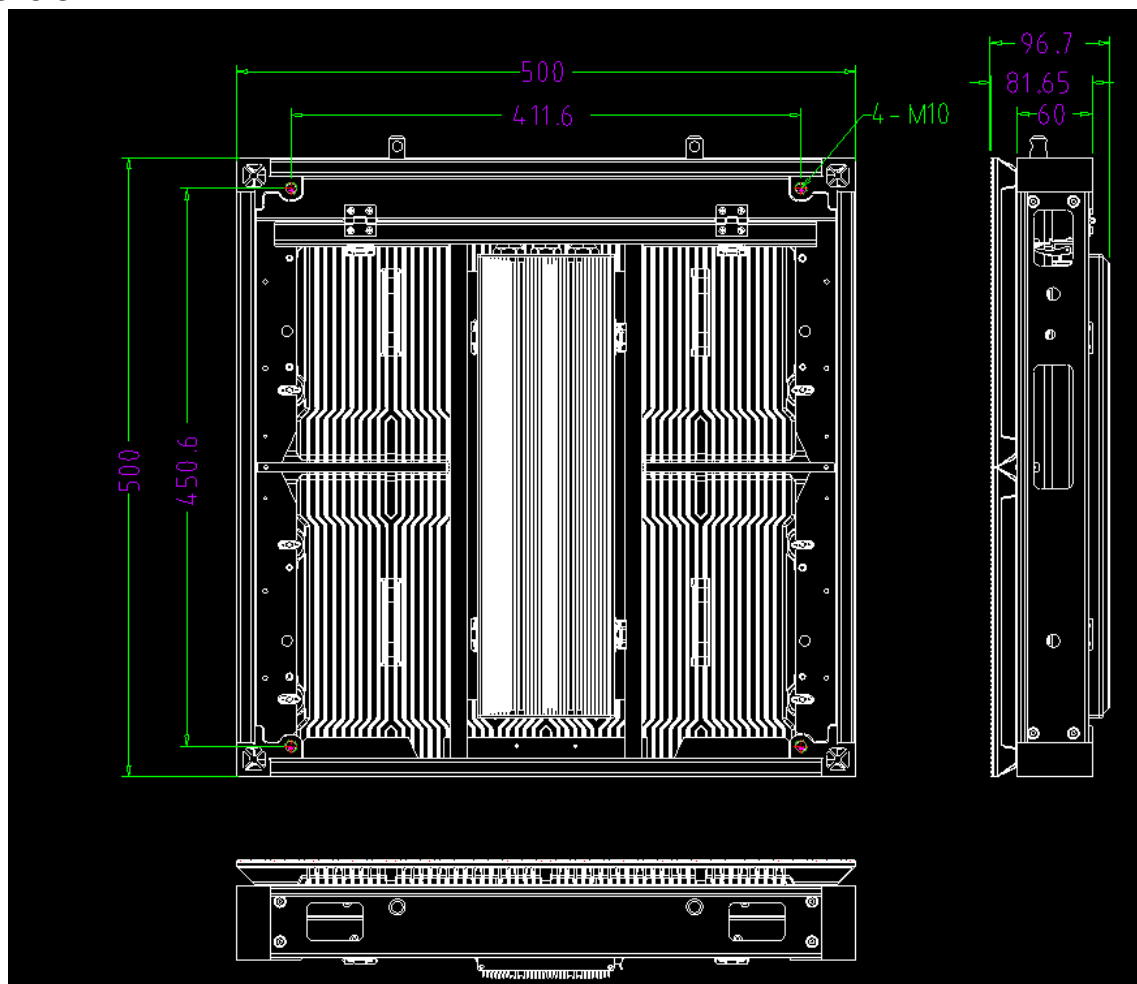

Unit: mm

▪ **Accessory**

▪ **Included**

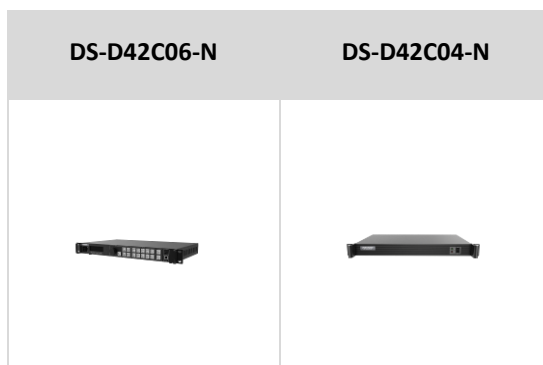

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

