



INDOOR ULTRA HIGH DEFINITION


[UHD SERIES]

UHD2S HE2Spro HE1S HE1Spro

- Comfort view (real 16:9 ratio)
- The picture is clearer and delicate
- Low radiation
- Zero noise
- High-efficiency cooling
- High flatness and smoothness
- High precision
- High protection- IP60
- Semi-automatic installation structure
- Support power supply and signal backup



Cabinet drawing

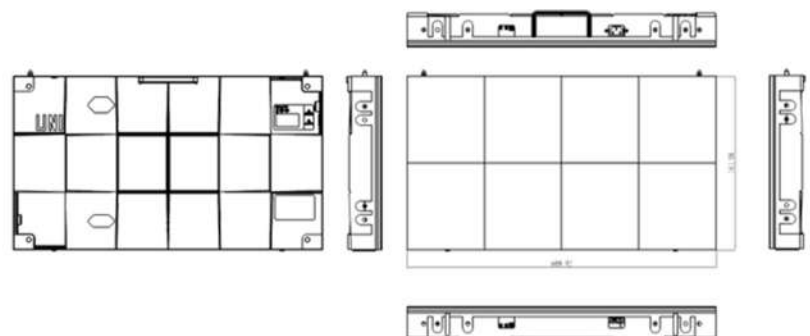

TECHNICAL PARAMETERS

Parameter	UHD2S(l)	UHD2Spro(l)	UDH1S(l)	UHD1Spro(l)
Pixel configuration	3-in-1 SMD2020	3-in-1 SMD1515	3-in-1 SMD1010	3-in-1 SMD0808
Pitch(mm)	2.54	1.91	1.59	1.27
Module size(mm)(wxh)	152.48x343.08	152.48x171.54	152.48x171.54	152.48x171.54
Module resolution(wxh)	60x135	80x90	96x108	120x135
Cabinet size(mm) (wxh)	609.92x343.08x68			
Cabinet resolution(wxh)	240x135	320x180	384x216	480x270
Pixel density (pixels/m ²)	155000	275267	396550	620001
Cabinet type	Die-casting Aluminum			
Cabinet weight(kg/cabinet)	7			
Cabinet serviceability	Front			
Ingress protection (front/rear)	IP60			
Brightness	800	800	600	600
Brightness control	256 levels Manual/Automatic			
Contrast ratio	10000 : 1			
Color	4.4 Trillion			
Grayscale	16 bit			
Frame rate(Hz)	50&60			
Refresh rate(Hz)	3840			
Horizontal viewing angle(°)	140	140	140	160
Vertical viewing angle(°)	140	140	140	160
Max power consumption(w/m ²)	≤ 600			
Average power consumption(w/m ²)	≤ 200			
Drive mode	Constant current drive			
Operation temperature(°C)	-20 to 50			
Operation humidity(RH)	10%-90% no condensation			
Input signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc.			
Data interconnection	Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km)			
Lifetime(hrs)	100000			



***All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63,65,67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

