




## INDOOR HIGH END

[ HE SERIES ] HE4S HE3S HE2S HE2Spro

- Incredibly clear and vivid picture
- Standard size
- Super light and slim
- Noiseless
- Low power consumption
- Quick installation
- Fully front maintenance



### Cabinet drawing

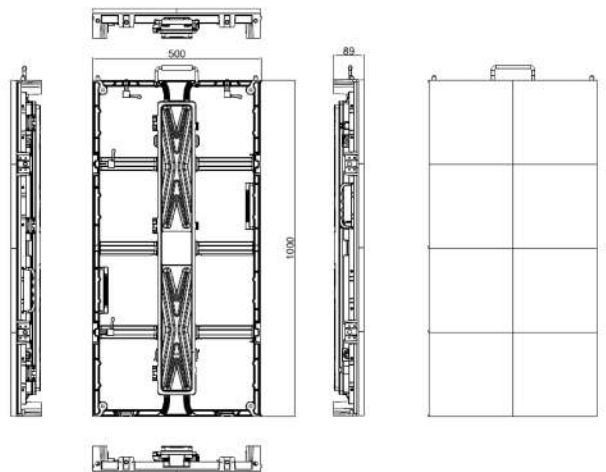

# TECHNICAL PARAMETERS

Parameter	HE4S(I)	HE3S(I)	HE2S(I)	HE2Spro(I)
Pixel configuration	3-in-1 SMD2121	3-in-1 SMD2121	3-in-1 SMD2121	3-in-1 SMD1515
Pitch(mm)	3.91	2.98	2.60	1.95
Module size(mm)(wxh)	250x250			
Module resolution(wxh)	64x64	84x84	96x96	128x128
Cabinet size(mm) (wxh)	500x1000x89	500x1000x89	500x1000x84	500x500x84
Cabinet resolution(wxh)	128x256	168x336	192x384	256x256
Pixel density (pixels/m <sup>2</sup> )	65536	112896	147456	262144
Cabinet type	Die-casting Aluminum			
Cabinet weight(kg/cabinet)	12.5	12.5	12.5	7.5
Cabinet serviceability	Front & Rear			
Ingress protection (front/rear)	IP40/IP30			
Brightness	1000	1000	800	800
Brightness control	256 levels Manual/Automatic			
Contrast ratio	4000 : 1			
Color	4.4 Trillion			
Grayscale	16 bit			
Frame rate(Hz)	50&60			
Refresh rate(Hz)	1920	3840	3840	3840
Horizontal viewing angle(°)	140	140	140	160
Vertical viewing angle(°)	140	140	140	160
Max power consumption(w/m <sup>2</sup> )	≤ 420			
Average power consumption(w/m <sup>2</sup> )	≤ 140			
Drive mode	Constant current drive			
Operation temperature(°C)	-20 to 50			
Operation humidity(RH)	10%-90% no condensation			
Input signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc.			
Data interconnection	Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km)			
Lifetime(hrs)	100000			



\*\*\*All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63, 65, 67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320  
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

