



## INDOOR STANDARD

[ STD SERIES ]


STD4S STD3S STD2S STD2Spro

- Multi pexel pitches for option
- Customized size
- Nationstar lamp
- Clear and vivid picture
- Front maintenance
- High-Efficiency Cooling
- Guarantee best quality



### Cabinet drawing

(size base on requirement)

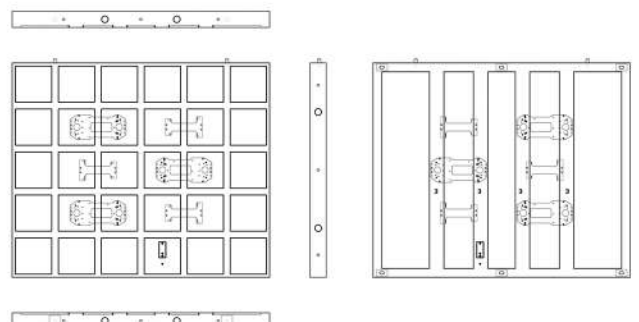

# TECHNICAL PARAMETERS

Parameter	STD4S(I)	STD3S(I)	STD2S(I)	STD2Spro(I)
Pixel configuration	3-in-1 SMD2121	3-in-1 SMD2121	3-in-1 SMD2121	3-in-1 SMD1515
Pitch(mm)	4.00	3.00	2.50	2.00
Module size(mm)(wxh)	256x128	192x192	160x160	256x128
Module resolution(wxh)	64x32	64x64	64x64	128x64
Cabinet size(mm) (wxh)	512x512x100	576x576x100	480x480x100	512x512x100
Cabinet resolution(wxh)	128x128	192x192	192x192	256x256
Pixel density (pixels/m <sup>2</sup> )	62500	111111	160000	250000
Cabinet type	Steel			
Cabinet weight(kg/cabinet)	10-15			
Cabinet serviceability	Front & Rear			
Ingress protection (front/rear)	IP30			
Brightness	1000	1000	800	800
Brightness control	256 levels Manual/Automatic			
Contrast ratio	3000 : 1			
Color	16.7 Billion			
Grayscale	14 bit			
Frame rate(Hz)	50&60			
Refresh rate(Hz)	1920			
Horizontal viewing angle(°)	140	140	140	160
Vertical viewing angle(°)	140	140	140	160
Max power consumption(w/m <sup>2</sup> )	≤ 800			
Average power consumption(w/m <sup>2</sup> )	≤ 260			
Drive mode	Constant current drive			
Operation temperature(°C)	-10 to 50			
Operation humidity(RH)	10%-80% no condensation			
Input signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc.			
Data interconnection	Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km)			
Lifetime(hrs)	100000			



\*\*\*All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63, 65, 67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320  
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

