



OUTDOOR STANDARD


[STD SERIES]

STD10S STD8S STD6S STD5S

- Multi pixel pitches for option
- Customized size
- Nationstar lamp
- Clear and vivid picture
- High-Efficiency cooling
- High level of protection
- Guarantee good quality



Cabinet drawing
(size base on requirement)

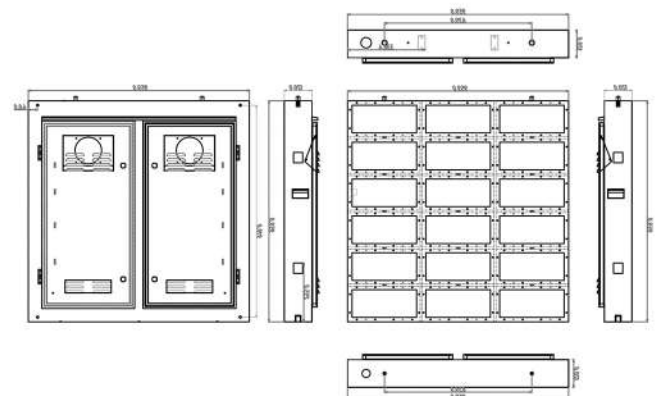

TECHNICAL PARAMETERS

Parameter	STD10S(O)	STD8S(O)	STD6S(O)	STD5S(O)
Pixel configuration	3-in-1 SMD3535	3-in-1 SMD3535	3-in-1 SMD2727	3-in-1 SMD2727
Pitch(mm)	10.00	8.00	6.00	5.00
Module size(mm)(wxh)	320x160	320x160	192x192	320x160
Module resolution(wxh)	32x16	40x20	32x32	64x32
Cabinet size(mm) (wxh)	960x960x150			
Cabinet resolution(wxh)	96x96	120x120	160x160	192x192
Pixel density (pixels/m ²)	10000	15625	27777	40000
Cabinet type	Steel			
Cabinet weight(kg/cabinet)	40			
Cabinet serviceability	Rear			
Ingress protection (front/rear)	IP65/IP54			
Brightness	6000	5500	5500	5000
Brightness control	256 levels Manual/Automatic			
Contrast ratio	4000 : 1			
Color	16.7 Billion			
Grayscale	14 bit			
Frame rate(Hz)	50&60			
Refresh rate(Hz)	1920			
Horizontal viewing angle(°)	140			
Vertical viewing angle(°)	120			
Max power consumption(w/m ²)	≤ 800			
Average power consumption(w/m ²)	≤ 260			
Drive mode	Constant current drive			
Operation temperature(°C)	-10 to 50			
Operation humidity(RH)	10%-90% no condensation			
Input signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc.			
Data interconnection	Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km)			
Lifetime(hrs)	100000			



***All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63, 65, 67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

