



OUTDOOR STRENGTH


[STR SERIES]

STR16S STR10S STR8S STR6S

- Up to 10,000 nits brightness
- Stable and reliable, suitable for almost any environment
- Energy-saving
- Ultra thin & Super light weight
- Support both front and rear maintenance
- Various size with more splicing



Cabinet drawing

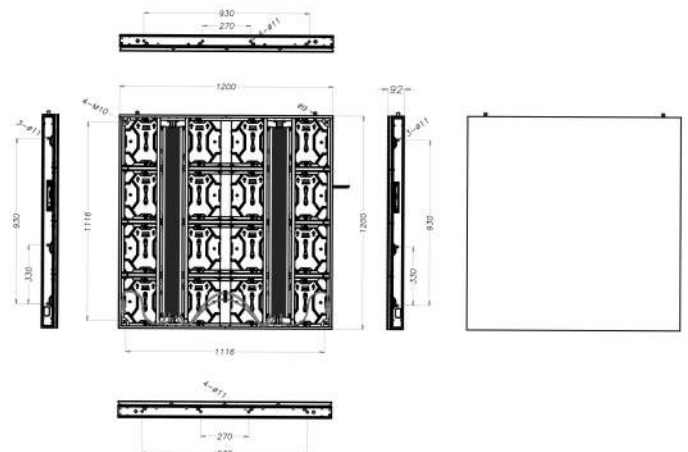

TECHNICAL PARAMETERS

Parameter	STR16S(O)	STR10S(O)	STR8S(O)	STR6S(O)
Pixel configuration	3-in-1 SMD3535	3-in-1 SMD3535	3-in-1 SMD3535	3-in-1 SMD2727
Pitch(mm)	16.67	10.00	8.33	6.82
Module size(mm)(wxh)	300x300			
Module resolution(wxh)	18x18	30x30	36x36	44x44
Cabinet size(mm) (wxh)	1200x1200x96			
Cabinet resolution(wxh)	72x72	120x120	144x144	176x176
Pixel density (pixels/m ²)	3600	10000	14400	21511
Cabinet type	Aluminum			
Cabinet weight(kg/cabinet)	38			
Cabinet serviceability	Front & Rear			
Ingress protection (front/rear)	IP65			
Brightness	8000	8000	7500	7000
Brightness control	256 levels Manual/Automatic			
Contrast ratio	8000 : 1			
Color	16.7 Million			
Grayscale	14 bit			
Frame rate(Hz)	50&60			
Refresh rate(Hz)	1920			
Horizontal viewing angle(°)	150			
Vertical viewing angle(°)	140			
Max power consumption(w/m ²)	≤ 600			
Average power consumption(w/m ²)	≤ 200			
Drive mode	Constant current drive			
Operation temperature(°C)	-20 to 60			
Operation humidity(RH)	10%-90% no condensation			
Input signal	DVI/HDMI/VGA/SDI/DP/AV/S-Video, etc.			
Data interconnection	Network cable(L ≤ 100m), Multi-mode fiber (L ≤ 300m), Single mode fiber (L ≤ 15km)			
Lifetime(hrs)	100000			



***All specifications are subjected to change without notice

"We are professional in audio visual systems"



CHINAVUT MARKETING CO., LTD.

63, 65, 67 Soi Rungruang , Ratchadapisek Rd., Samsaennok , Huay-Kwang Bangkok 10320
Tel : 0-2694-3000 , Email : info@chinavut.com , www.chinavut.com

Available from :

