

Roll

Roll

ROLL is a flexible homogeneous floor covering in sheet produced by extrusion process with plain color design. It is suitable for medium to high traffic areas.

Place Recommended


Healthcare, Hospital, Clinic, Office Administration, Education, Hotel, Restaurant, Retail, Industry




RE-9485



RE-9417

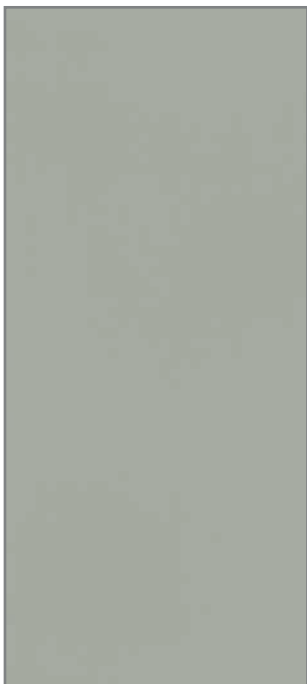

RE-9435

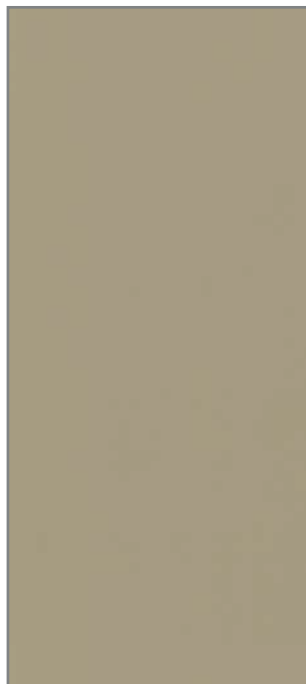

RE-9439



 *Size*
1 m. x 20 lm.

 *Thickness*
2.0 mm.

 *Type*
Sheet

 *Treatment*
No

Shades and colors may vary slightly from actual tiles. Please request actual sample from Marketing and Sales Department

ROLL is a flexible homogeneous floor covering in sheet produced by extrusion process with plain color design. It is suitable for medium to high traffic areas.



LET'S ROLL!

Every idea can be created into many formats.
Our roll collection will support your imagination as well.

Installing

1. Preparing Subfloor



Hard, level, dry, smooth, sound and clean

2. Laying Method



2.1 Unrolled and left 24 hrs. before laying



2.2 Trace a line



2.3 Lay sheet along guideline



2.4 Fold back sheet half way



2.5 Apply adhesive



2.6 Smooth down sheets manually



2.7 Roll with 50kg roller



2.8 Heat weld the joints 24 hrs after installation

Maintenance

Initial Cleaning



Remove loose debris



Low speed cleaning machine

Protection



Apply wax

Daily Maintenance



Dry sweeping or remove dirt with a damp mop

Periodic Maintenance



High speed cleaning machine

For full specification, installation, and maintenance details, please refer to the handbook