

DS-D4280FO-GLF P8 Outdoor Fixel LED Display Unit



- Support front and rear maintenance
- Using aluminum chassis, good heat dissipation and can work under 60 °C
- All series aluminum profile cabinets support IP67(F)/IP66(R)
- Apply unique technology, maximally saving 50% energy
- Various cabinet sizes, applying to diverse scenes
- The cabinets support customized 45° corner cut to realize 90° right-angle splicing


▪ Specification

Model		DS-D4280FO-GLF
Cabinet	Pixel Configuration	1R1G1B
	Pixel Pitch Category	P8
	Pixel Pitch	8 mm
	Modules Component	Aluminum Shell
	Dimensions (W × H × D)	960 mm × 960 mm × 97 mm (37.8" × 37.8" × 3.82")
	Resolution	120 × 120
	Area	0.9216
	Weight	28 KG/PCS
	Pixel Density	15625 dots/m ²
	Lamp Board Housing	YES
	Cabinet Material	Aluminum Profile
	Maintenance Method	Front/Back Maintenance
	Cabinet Flatness	0.8 mm
	Protection Level	IP67(F)/IP66(R)
Display	White Balance Brightness	10000
	Color Temperature	3000 K to 10000 K
	Viewing Angle	160° (H)/80° (V)
	Contrast Ratio	8000:1
	Color Uniformity	≥ 95%
	Brightness Uniformity	≥ 95%
Processing Performance	Driving Method	Constant Current
	Frame Frequency	50/60 HZ
	Refresh Rate	3840
	Grey Level	14 bit
	Display Color	DCI-P3 > 85%
Power	Power Supply	110 to 220
	Max. Consumption	580
	Average Consumption	200
Working Environment	Working Temperature	-40 to 60 °C
	Working Humidity	10% to 95% RH (non-condensing)
	Storage Humidity	10% to 95% RH (non-condensing)
	Storage Temperature	-40 to 80 °C
General	Gross Weight	190
	Package Dimensions (W × H × D)	1040 mm × 750 mm × 1130 mm
	Lifespan	100000 Hours

▪ **Available Model**

DS-D4280FO-GLF

▪ **Dimension**

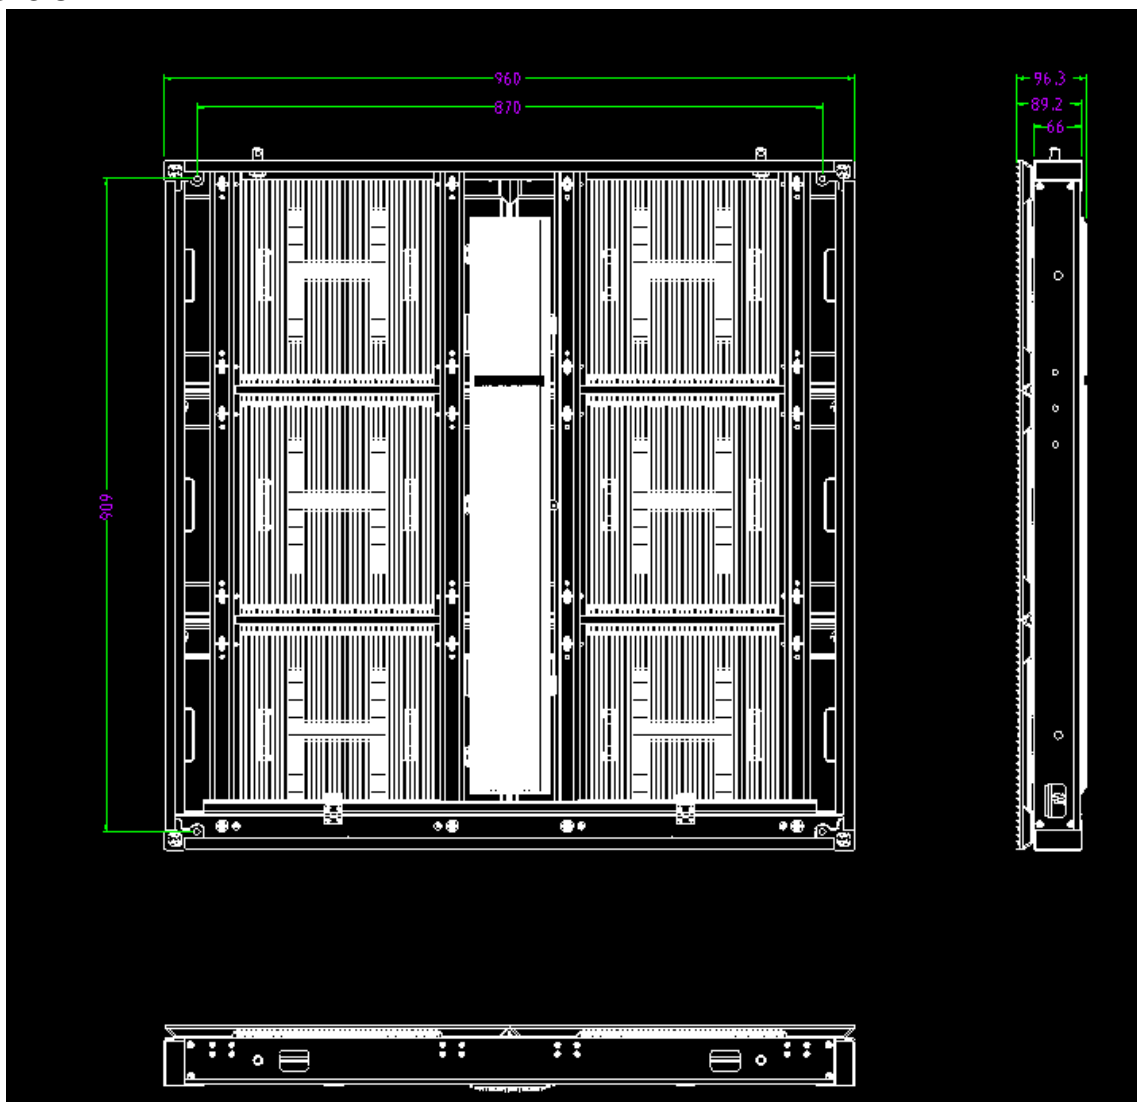

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

